

**CEILING FAN WARRANTY DETAIL**

Customer details

Surname \_\_\_\_\_ First Name \_\_\_\_\_

Address \_\_\_\_\_

Daytime Ph \_\_\_\_\_ A/h Ph \_\_\_\_\_

Email \_\_\_\_\_

Warranty Details

Date of Purchase \_\_\_\_\_ Date of Installation \_\_\_\_\_

Product Description \_\_\_\_\_

Place of Purchase \_\_\_\_\_ Serial No \_\_\_\_\_

Installing Electrician Details

Name of Electrical Contactor \_\_\_\_\_

Company Name \_\_\_\_\_

License Number \_\_\_\_\_ Ph \_\_\_\_\_

Address \_\_\_\_\_

ATTACH PROOF OF PURCHASE HERE.


THIS COMPLETED DETAIL PAGE MUST BE PRODUCED TO OBTAIN WARRANTY SERVICE.



*Lifestyle*

Series

52" CEILING FAN  
INSTRUCTION BOOK

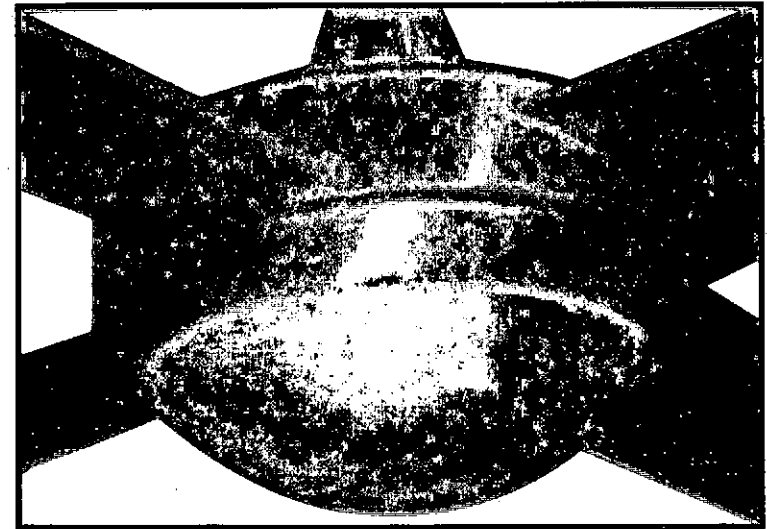

MODE L: DLS134 SERIES

Thank you for purchasing your MARTEC LIFESTYLE Series product. Please read all instructions carefully before assembly and use.

### Important Safeguards

**READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR USING THE PRODUCT. KEEP THE INSTRUCTIONS HANDY FOR FUTURE REFERENCE.**

**Important:** always operate the product from a power source of the same Voltage, Frequency and rating as on the product Identification Plate.

**Important:** The fan is to be installed so that the blades are more than 2.1 metre above the floor.

Avoid contacting moving parts, Keep hands, hair, clothing well away from the product while it is in operation,

A Luminaire (Light fitting) included in the fan packaging (or Martec Model: LCD134\* Lighting kit sold separately) may only be fitted to this Fan.

This appliance is not intended for use by young children or infirm persons unless they are adequately supervised by a responsible person to ensure that they can use the appliance safely.

Young children should be supervised to ensure that they do not play with the appliance.

Do not operate any product which has been/or appears damaged in any manner or after the product malfunctions.

**CAUTION:** To reduce the risk of electric shock, do not install the product where it can be exposed to rain, moisture or any liquid.

Do not operate this product in the presence of explosive, fumes and/or flammable liquid.

Do not use the product for other than its intended use as described in these instructions. This product is intended for normal domestic household use only. The use of accessory attachments other than those recommended by the manufacturer may cause safety hazards.



### MARTEC PTY LTD 2 YEAR IN STORE REPLACEMENT WARRANTY

#### WARRANTY STATEMENT:

MARTEC PTY LTD ABN: 36 056 068 127 warrants this product for a period of 2 YEARS IN STORE REPLACEMENT FROM THE ORIGINAL DATE OF PURCHASE for residential situations and 90 days for commercial usage.

**IMPORTANT NOTICE: EXCLUDES ALL LABOUR COSTS ASSOCIATED WITH INSTALLATION AND REMOVAL OF THE FAN FOR REPLACEMENT WARRANTY. ALL FANS MUST BE RETURNED COMPLETE IN CARTON.**

1) The obligation to the purchaser under this warranty is limited to replacement of the product and not parts at our discretion when the product is returned to the store of original purchase. All transport costs and labour costs in relation to the replacement of the fan will be the responsibility of the purchaser.

2) Any claim made in relation to this warranty is solely limited to the cost of replacement of the product. No acceptance of other liability for incidental or consequential damage is covered. This warranty becomes VOID if the product was not INSTALLED BY A QUALIFIED LICENSED ELECTRICIAN or has been tampered with, damaged, repaired by a non qualified electrician or becomes faulty in any way through improper use. Normal wear and tear, accident, abuse, failure to use the product in accordance with the instructions relating to the installation, use and maintenance of the product is NOT covered by this warranty nor is the use in a commercial application.

This warranty is limited to the product being replaced ONLY and does not include labour costs, freight or reinstallation costs. The product warranty is limited to defects in workmanship only and does not apply to loss or damage caused by abnormal or excessive force of any kind from internal or external sources.


This warranty covers the MOTOR ONLY it does not cover light fittings, electrical humming noises, wobbling or any other external influences. It ONLY covers manufacturing faults associated with the MOTOR ONLY such as clunking and grinding by improper seating of bearings.

The warranty will not cover the entry of foreign matter or influences to the product including but not limited to liquid, moisture, dirt, dust or electrical fluctuations. Power supply faults or influences resulting in damage to this product are not covered under this warranty. The warranty does not cover any loss, damage or delay directly or indirectly caused by any malfunction of or defect of or failure of the product other than stated in this warranty.

#### IMPORTANT NOTICE:

**ALL CLAIMS FOR WARRANTY MUST BE ACCOMPANIED WITH THE COMPLETED WARRANTY CARD (SERIAL NUMBER FILLED OUT) INCLUDED WITH THIS PRODUCT. THIS INFORMATION WILL INCLUDE THE PURCHASE RECEIPT, ELECTRICIANS INTALLATION RECEIPT AND LICENSE NUMBER AND THE PURCHASERS FULL NAME AND DETAILS.**

Martec Pty Ltd  
PO Box 733 Noble Park, Victoria 3174, Australia

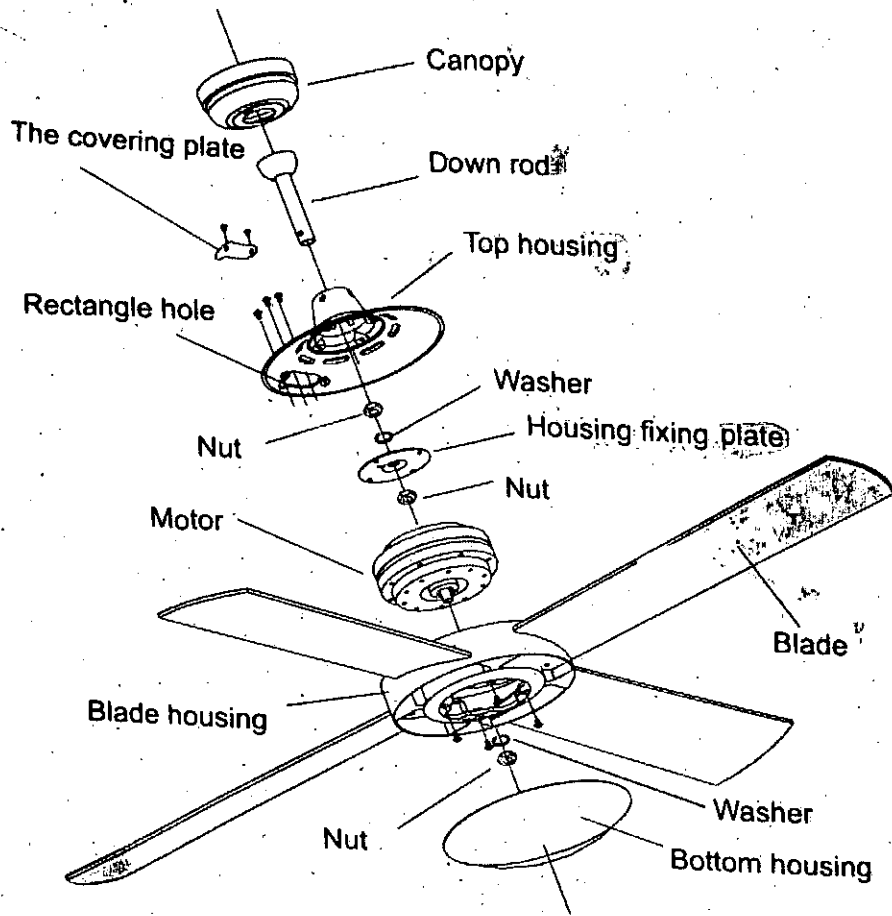

### SAFETY

Installation of fans must follow S.A..A standards and meet local Authority regulations. A fully qualified and licensed electrician lawfully **MUST** carry out installation. Means for disconnection must be incorporated in the fixed wiring in accordance with wiring rules.

Fan and light **MUST** be earthed. Bracket **MUST** be firmly attached to a solid structure i.e. concrete ceiling, steel structure or timber frame etc. and **MUST** be nailed between beams if timber option is required. **ONLY** install the wall controller kit that comes supplied by Martec Pty Ltd within package. **DO NOT** control operation Of fan or light with any other wall controller than what has been approved by Martec Pty Ltd and supplied within this package, as this will void warranty.

### WARNING

Only approved Martec Pty Ltd wall controllers should be used for the operation of our fans. The use of unauthorized controllers will void warranty **DO NOT** mix blade from one fan to another. All blades must be replaced if damaged.

### HOW TO ASSEMBLE

Secure the hanger bracket to ceiling beam or a suitable piece of timber inserted between the ceiling beams. Martec Pty Ltd recommends bracket be attached with two (2) long screws as supplied within the package. (See fig.1.)

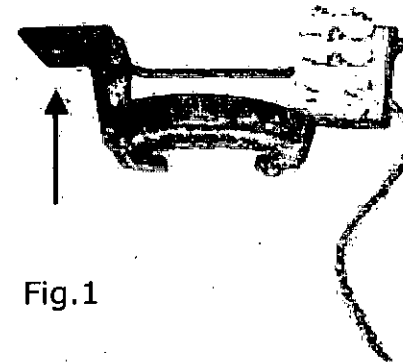


Fig.1

Place fan into hanger bracket and align Ball Joint Slot with hanger bracket as illustrated. (See fig.2).

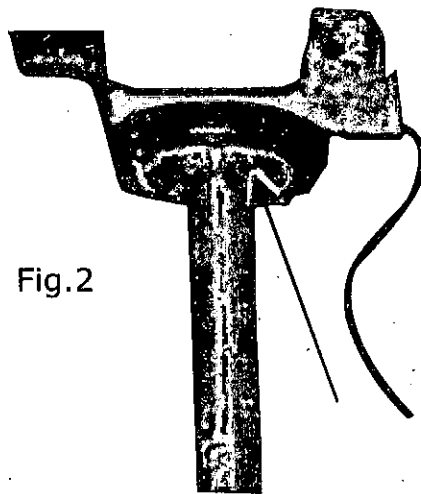


Fig.2

After wiring is completed, attach the canopy to the hanger bracket by pushing upwards and twisting anti-clockwise. Locate screws in keyholes and tighten. (See fig.3)



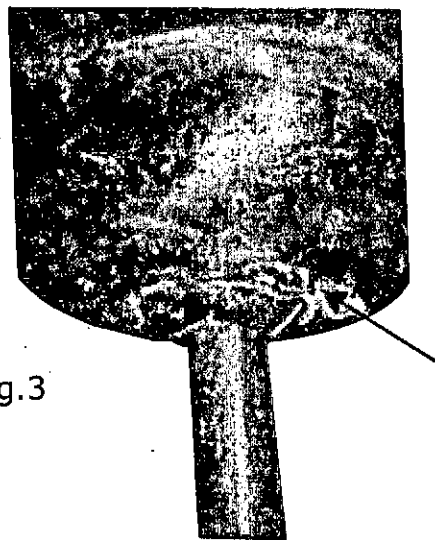


Fig.3

### EXPLODED DIAGRAM

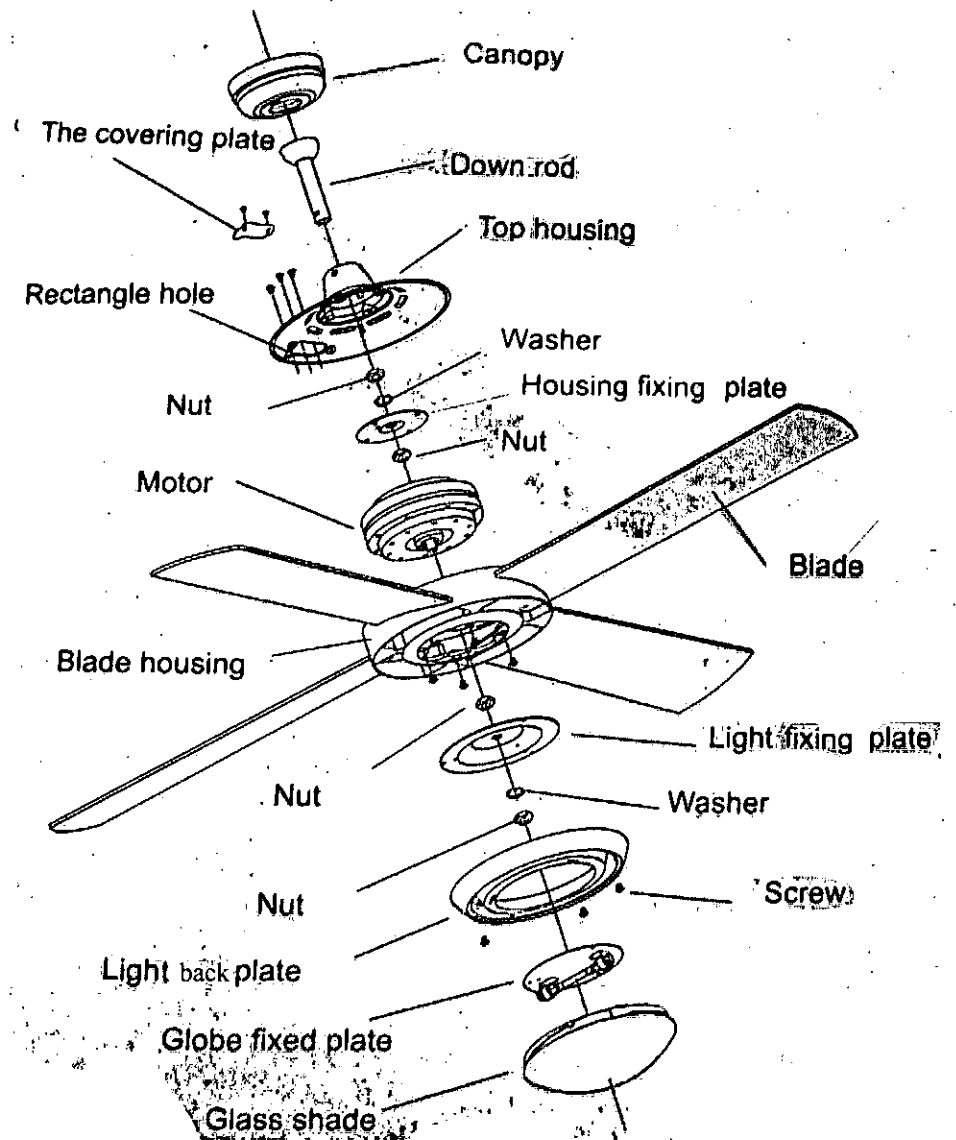

## WIRING INSTRUCTIONS

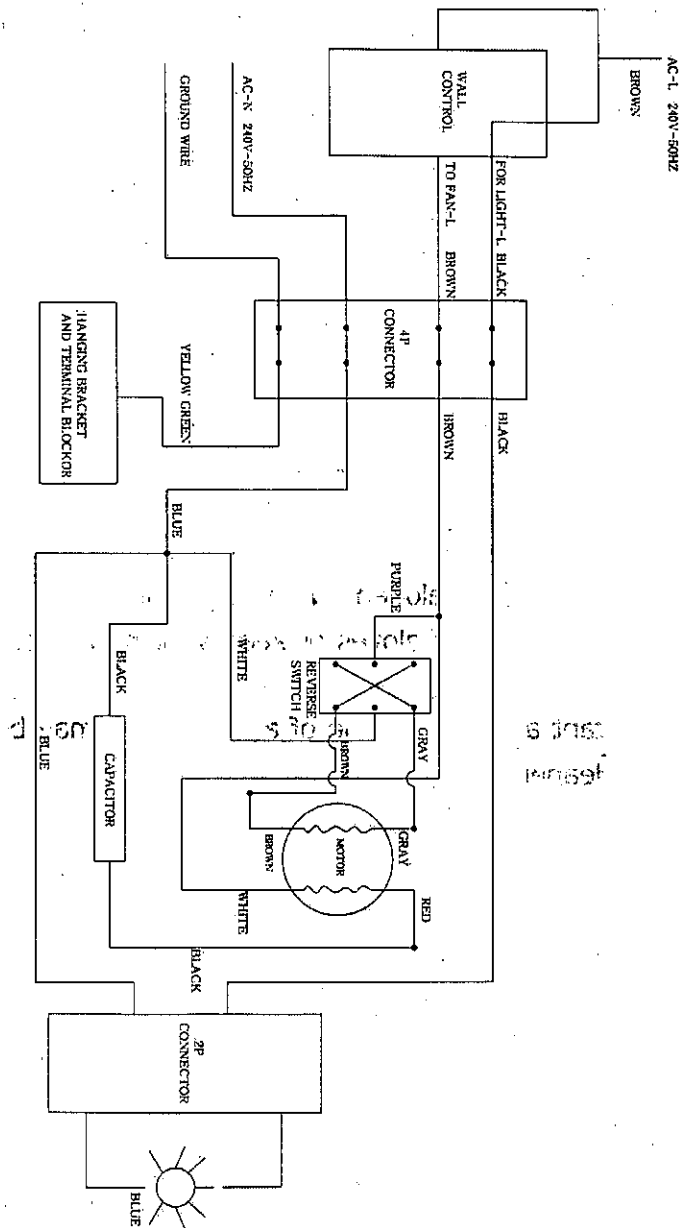


## HOW TO INSTALL BLADES

Remove the two screws from the covering plate of blade-fixing hole (See fig.4.)

Insert blades one at a time through four slots around the canopy and secure with three screws for each blade through the top opening. Repeat this procedure for all blades (See fig.4)


Replace the cover plate and secure with two screws once all four blades have been firmly fitted.

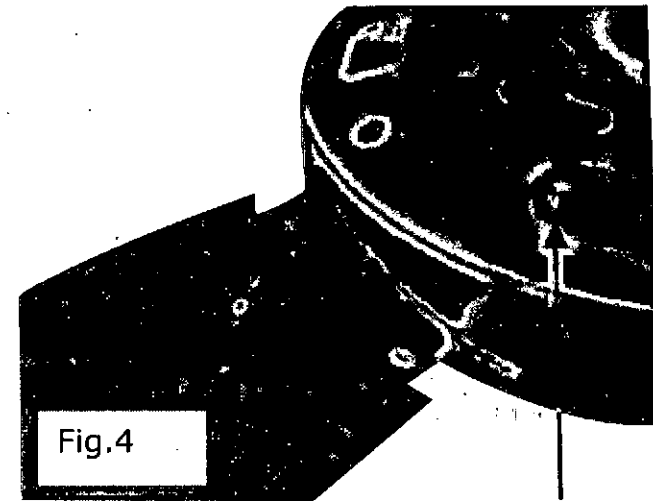

## USE IN ALL SEASONS

Always ensure fan is set to 'OFF' and blades are still prior to changing direction of blades.

Reverse switch on fan should ideally be set on 'FORWARD' (down position) during warmer seasons to move blades in an anticlockwise direction & 'REVERSE' (up position) during our cooler seasons to make the fan rotate in a clockwise direction. (See fig.5.)

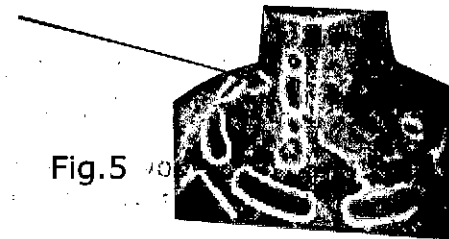

## ASSEMBLING THE LIGHT FITTING

- (a) as supplied in the fan package, or
- (b) MARTEC Model: LCD 134\* Lighting (sold separately).

Important :The power MUST be disconnected to the product prior to any assembly.

1. To assemble the light to the fan the bottom housing has to be removed from the fan (see fig 6) by rotating anticlockwise.
2. Retrieve the lighting cables in the lower tube by grasping and gently pulling with pliers.
3. Pass the cables through the light back-plate and secure the back-plate to the fan light fixing plate with the screws and washers supplied.
4. Remove the insulation from the cable ends and connect into the terminal block.

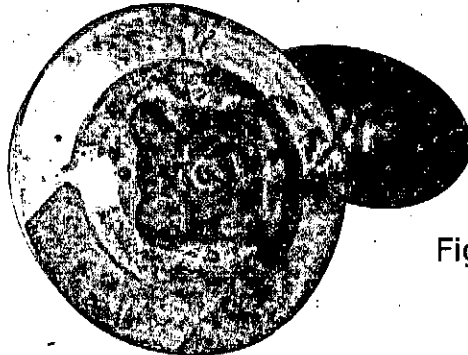


Fig.6

## HOW TO REMOVE THE SHADE FOR INSTALLING LIGHT BULBS (Version with lights)

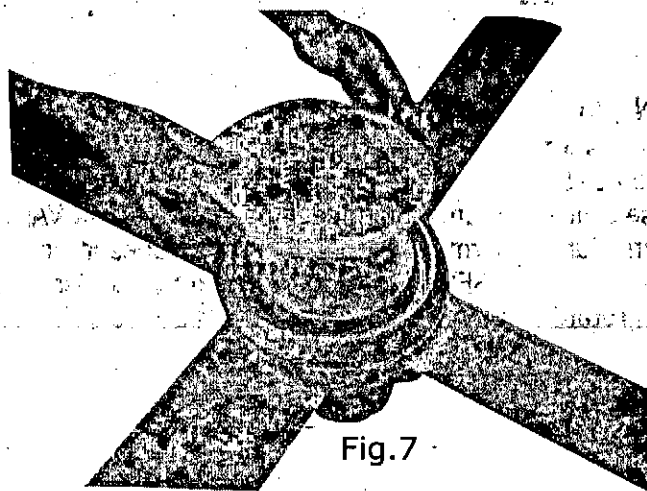


Fig.7

Remove the Lamp Shade carefully as shown in the figure 7. Turn anticlockwise to remove and clockwise to tighten the lampshade.

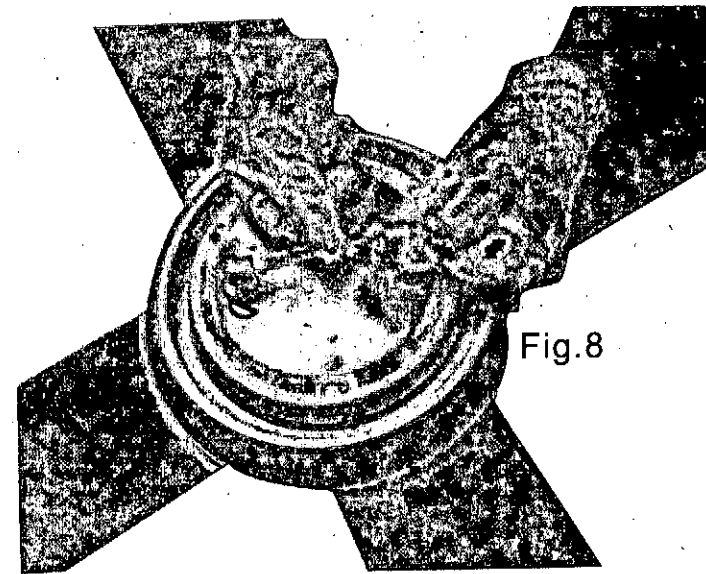


Fig.8

Only Quartz Halogen globes with 100W(MAX.) Shall be used. Insert the Quartz Halogen bulb in the holder(see fig.8). Always use a pair of gloves or keep your hands clean when installing or replacing Halogen Globes. Keeping the globe clean is important and the lifetime of a dirty globe may be shorter than a cleaner globe.